


2GIG PANEL KEYPAD QUICKGUIDE



2GIG Go Control Keypad

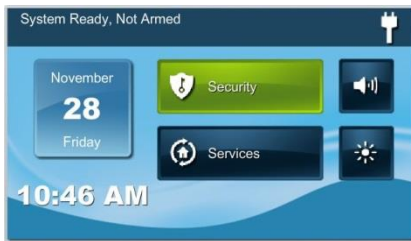

2GIG Home Screen



2GIG Main SECURITY Menu



2GIG Arming Screen

Arm System – All protected windows and doors must be closed. Ready light should be green.

- **Away**— From Home Screen- Press **SECURITY** button, Press **ARM** button, Press **AWAY** Arms all devices including motion detectors.
- **Stay**— From Home Screen- Press **SECURITY** button, Press **ARM** button, Press **STAY** Arms all devices and automatically bypass all motion detectors.
- **Instant**— From Home Screen: Press **SECURITY**, Uncheck **ENTRY DELAY**, Press **STAY** Arms entry doors without delay and bypass all motion detectors.
- **Maximum:** From Home Screen: Press **SECURITY**, Uncheck **ENTRY DELAY**, Press **AWAY** Arms all devices and will arm all entry doors without an entry delay.

Turn System Off: From Security Screen, Press **DISARM**, Enter Code.

Silence an Alarm: From the Security Screen, Press **Disarm**, Enter Code.

Reset System/Clear Alarm History: From Home Screen, Press Red Bell Button , Check “**Clear Alarm History**” Button, Press **OK**

Door Chime On/Off: 2 Different Methods: All Chimes Off: Uncheck **CHIME** box on 2GIG Main Menu Screen (From Home Screen Press **SECURITY**). Individual Chimes Off: Press **TOOLBOX** button in Main Menu Screen. Enter Master User Code. From Toolbox menu, press **CHIME SETUP**. Select sensor and Chime style/type.

Bypass A Zone: 2 METHODS AVAILABLE: Forced Bypass: From Arming Screen, Press **STAY** or **AWAY** command. Press **BYPASS ALL** when prompted. Enter User Code. Manually Bypass: Navigate to **TOOLBOX** from Main Security Menu Screen. Enter USER code, Press Bypassed Sensors. Confirm Selections.

Panic Buttons: Press  Emergency Button on Front of Alarm Keypad. Select **FIRE**, **POLICE** or **EMERGENCY (EMS)**. Press and HOLD selection for 2 or more seconds.

Change or Add Additional Codes: Navigate to **TOOLBOX** from Main Security Menu. Press **USER CODE MANAGEMENT**. Enter Master Code (#1 User code). Select desired code to change or next open user code line. Follow prompts to add code. Enable scheduling of code if desired.

Delete A User Code: Navigate to **TOOLBOX** from Main Security Menu. Press **USER CODE MANAGEMENT**. Enter Master Code (#1 User code). Select desired code to erase. Follow prompts to erase code.

Sending a Test Signal: Navigate to **TOOLBOX** from Main Security Menu. Press User Code. Press arrow key to navigate to **CELL PHONE TEST** or **TELEPHONE LINE TEST**. Press Code. Activate test.